



Survivor DAB Radio All-in-1 4500

Numru tal-o??ett.:









421-17



EAN:



5705730421174




Sandberg Survivor DAB Radio All-in-1 4500 huwa apparat kompatt u durabbli li jg?aqquad diversi funzjonijiet f'wie?ed. Kemm jekk qed tg?addi minn avventura fil-wild jew qed tiffa??ja emer?enza, g?andu kollox li g?andek b?onn. Ja?dem b?ala power bank biex ti??ar?ja l-smartphone tieg?ek, speaker Bluetooth biex tistrimja l-mu?ika mill-mowbajl tieg?ek, u radju b'ri?eviment DAB u FM. B'panel solari mibni ?ewwa u manku li tista' ddawwar, tista' ti??ar?ja meta l-elettriku jkun barra, u ja?dem ukoll b'batteriji AAA b?ala alternattiva. Barra minn hekk, jipprovdi dawl kemm b?ala flashlight kif ukoll b?ala lampa tal-qari. Is-Sandberg Survivor DAB Radio All-in-1 4500 huwa lest g?al kull sitwazzjoni.



Aktar informazzjoni:



www.sandberg.mt



Sandberg Survivor DAB Radio All-in-1 4500

Spe?ifikazzjonijiet

Powerbank:

Capacity: 4500 mAh / 16.65 Wh / 3.7V

USB-A output: 5V/2A

USB-C input: 5V/2A

Approximate charging time:

By AC charger 5V/1.5A (0-100%): 4 hours

By solar panel (0-25%): 20 hours

By hand crank (0-25%): 5 hours

Radio:

DAB+: 170 - 240 MHz

FM: 87.5 - 108.0 MHz


Play time: Up to 20 hours when only using radio

Solar Panel:

Type: Polycrystalline

Voltage: 5V, 95 mA (0.48W max)

Torch LED: 1,5W

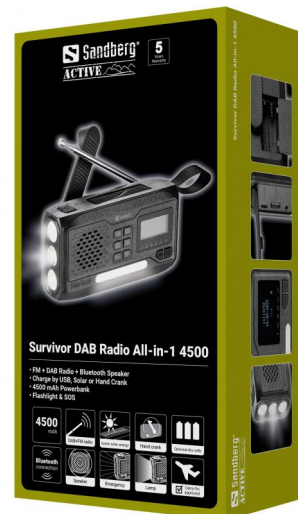

Informazzjoni tal-lppakkjar

1 Sandberg Survivor DAB radio All-in-1 4500

1 Quick guide

1 USB-A to USB-C charge cable 50 cm

Gwida rapida: <https://sandberg.mt/mt/manual/421-17>

Dimensjonijiet

	Prodott	Pakkett
G?oli (cm)	7.30	17.10
Wisa' (cm)	15.60	9.35
Fond (cm)	3.70	6.15
Pi? (g)	273.00	332.00



Prodott:

www.sandberg.world/product/survivor-dab-radio-allin1-4500

 Sandberg®

Bejjieg?: